




MAGNETEK
MATERIAL HANDLING

Product Transition Guide P3 Series 2 to G+ Mini

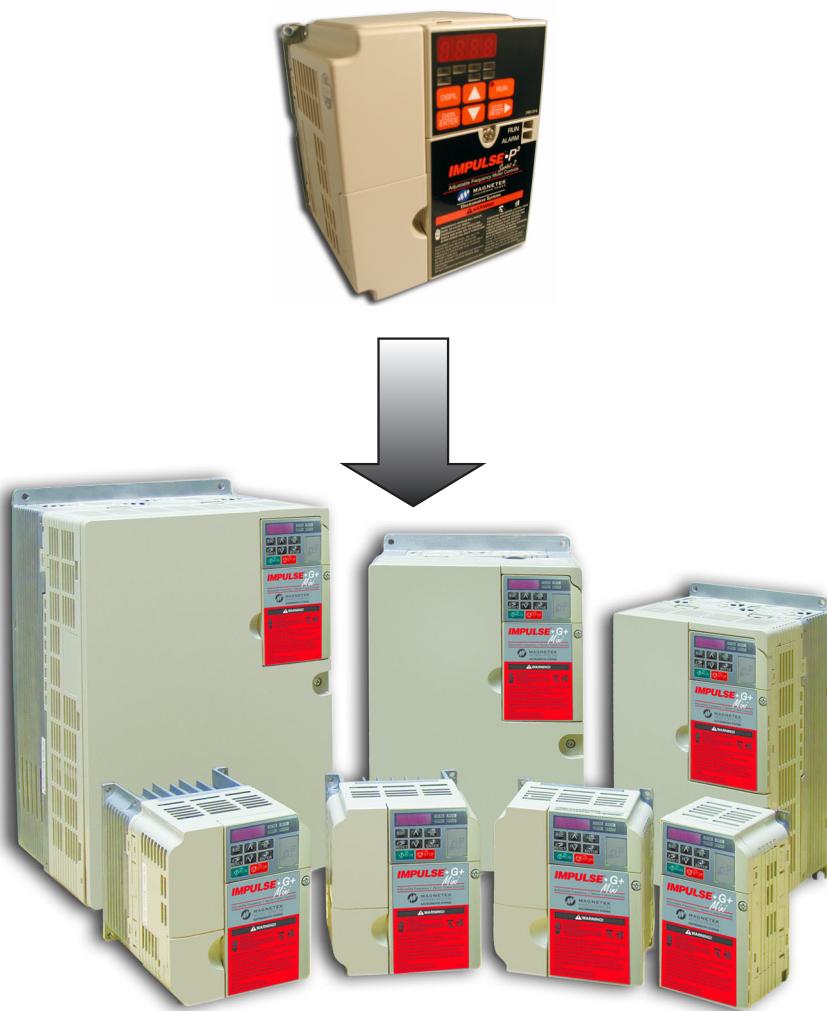

G+ Mini Transition Guide

Product Transition Guide

G+ Mini Rev:

Page Intentionally Left Blank

Product Transition Guide

Table of Contents

1.1	Overview	4
1.2	Drive Replacement Checklist	4
1.3	Ratings Summary	6
1.4	Terminals	7
	Main Circuit Terminals	7
	Control Terminals, Signal Levels	7
	Network Communications Terminals	8
	Terminal Size / Electric Wire Differences	9
	Control Terminal Sizes and Wire Sizes	11
1.5	Dimensions, Installation Space and Substitution Material	12
	P3 Series 2 Dimensions & Drive Ratings.....	12
	G+ Mini Dimensions & Drive Ratings	13
1.6	Parameter Correspondence Table	16
	P3 Series 2 and G+ Mini Differences in Parameter Settings	17
	P3 Series 2 and G+ Mini Parameter Correspondence for Drive Replacement	16
1.7	Appendix	20
	P3 Series 2 and G+ Mini Differences in Watts Loss	20
	P3 Series 2 and G+ Mini Specification Differences	21

Product Transition Guide

G+ Mini Rev:

1.1 Overview

The purpose of this document is to provide an easy transition from the P3 Series 2 (N060 = 00) to the G+ Mini (A01.01 = 1). For the advanced portion (A01.02 = 2), please refer to the G+ Mini Advanced instruction manual (P/N 144-25084).

1.2 Drive Replacement Checklist

	Item	Checkpoints	Checked?
Hardware	Basic	<ul style="list-style-type: none">Check if the new drive dimensions are bigger than the current drive. Can the mounting holes be used?<ul style="list-style-type: none">Verify that the existing dimensions reference in Section 1.5, “Dimensions, installation space and substitution material” of this manual compares the sizes of the current and new unit. If a mechanical substitution kit is necessary, it is referenced in Section 1.5.	
		<p>< Digital operator ></p> <ul style="list-style-type: none">Was a remote operator connected to the current unit?<ul style="list-style-type: none">If so, do not attempt to connect the P3 Series 2 remote operator to the G+ Mini, as they are incompatible.The digital operator for the G+ Mini can not be mounted remotely.	
	Main and Control Terminals	<p>< Wire Length ></p> <ul style="list-style-type: none">In the replacement drive, the main and control circuit terminals may be mounted in different positions. Check to ensure all cables are long enough to be connected to the new unit. <p>< Main circuit wires and terminal specifications ></p> <ul style="list-style-type: none">Compare the occupied terminals of the current unit with the new drive’s terminals (shape, size, etc.), and verify that the wires fit in the new unit’s terminals, using Section 1.4 “Terminals”, specifically “Control Terminal Sizes and Wire Sizes” of this document.	
Software	Parameter	<p>< Check the parameter settings ></p> <ul style="list-style-type: none">Read the parameter settings of the current unit and perform a parameter conversion to the new parameters following Section 1.6 “Parameter Correspondence Table”, specifically “P3 Series 2 and G+ Mini Differences in Parameter Settings” of this document.<ul style="list-style-type: none">If there is special software installed or parameters appear that are not mentioned in this document, contact your Magnetek representative.	

Product Transition Guide

G+ Mini Rev:

	Item	Checkpoints	Checked?
Options, Others	Option Cards	<p>< Is an option card installed? ></p> <ul style="list-style-type: none"> • Check if any option card is installed. – If an option card is installed, get the equivalent option card for the G+ Mini. – Never attempt to apply P3 Series 2 option cards to the G+ Mini unit. – The option card on the G+ Mini may have another connector on the P3 Series 2. Make sure that the connectors fit into the new option card before using it. 	
	Others	<p>< Is a braking resistor installed? ></p> <ul style="list-style-type: none"> • Check if a braking resistor is installed on the current drive. – Inspect the braking resistor for physical damage or wear before connecting it to the new drive. – Connect the braking resistor to the equivalent terminals on the new unit. – The terminals might have a different location in the new drive; check to ensure that existing wiring is long enough to reach the new terminal location. 	
	Others	<p>< Is a braking unit installed? ></p> <ul style="list-style-type: none"> • Check if a braking unit is used in the current installation. – Inspect the braking unit for physical damage or wear before connecting it to the new drive. – Connect the braking unit to the equivalent terminals on the new unit. – The terminals might have a different location in the new drive; check to ensure that existing wiring is long enough to reach the new terminal location. 	
		<p>< Is an AC reactor or DC choke installed? ></p> <ul style="list-style-type: none"> • Check if an AC reactor or DC choke is used in the current installation. – Inspect the reactor or choke for physical damage or wear before connecting it to the new drive. – Make sure that the reactor or choke data are appropriate for the replacement drive. – The terminals might have a different location in the new drive; check to ensure that existing wiring is long enough to reach the new terminal location. 	

- Refer to the instruction manual for questions about installation, parameter settings or detailed parameter/function descriptions.

Product Transition Guide

G+ Mini Rev:

1.3 Ratings Summary

The following table summarizes the output current ratings for the G+ Mini and P3 Series 2 with respect to the specific drive model.

Rated Input Voltage	P3 Series 2 Drive Model Number	Heavy Duty		G+ Mini Drive Model Number	Heavy Duty	
		Rated Output Current (Amps)	Nominal HP		Rated Output Current (Amps)	Nominal HP
200V, 3-Phase	2001-P3S2	1.6	1/4	2001-G+M	1.6	1/4
	2003-P3S2	3.0	1/2	2003-G+M	3.0	1/2
	2005-P3S2	5.0	3/4 & 1	2005-G+M	5.0	3/4 & 1
	2008-P3S2	8.0	2	2008-G+M	8.0	2
	2011-P3S2	11.0	3	2011-G+M	11.0	3
	2017-P3S2	17.5	5	2017-G+M	17.5	5
	2025-P3S2	25.0	7.5	2025-G+M	25.0	7.5
	2033-P3S2	33.0	10	2033-G+M	33.0	10
	N/A	N/A	N/A	2047-G+M	47.0	15
	N/A	N/A	N/A	2060-G+M	60.0	20
400V, 3-Phase	4001-P3S2	1.2	1/2	4001-G+M	1.2	1/2
	4002-P3S2	1.8	3/4	4002-G+M	1.8	3/4
	4003-P3S2	3.4	1 & 2	4003-G+M	3.4	1 & 2
	4004-P3S2	4.8	3	4004-G+M	4.8	3
	4008-P3S2	8.6	5	4009-G+M	9.2	5
	4014-P3S2	14.8	7.5 & 10	4014-G+M	14.8	7.5 & 10
	4018-P3S2	18.8	10	4018-G+M	18.0	10
	N/A	N/A	N/A	4024-G+M	24.0	15
	N/A	N/A	N/A	4031-G+M	31.0	20

1.4 Terminals

Main Circuit Terminals

- As the P3 Series 2 and G+ Mini may have different terminals sizes (depending on capacity), the terminals must be carefully checked before replacement.
- The main terminal functionality has not been changed between the P3 Series 2 and the G+ Mini drive.

Main Terminals		Note
P3 Series 2	G+ Mini	
R/L1	R/L1	Power supply connection
S/L2	S/L2	
T/L3	T/L3	
U/T1	U/T1	Drive output
V/T2	V/T2	
W/T3	W/T3	
B1	B1	Braking resistor or external braking unit connection
B2	B2	Braking resistor connection
+1	+1	DC Choke connection, DC power supply input
+2	+2	DC Choke connection
—	—	DC power supply input, external braking unit connection
⏚	⏚	Ground

Control Terminals, Signal Levels

- The P3 Series 2 and G+ Mini initial settings for terminal function are shown below.
- "—" indicates that an equivalent terminal on the other unit does not exist.

Control Terminals		Function	Signal Level	
			P3 Series 2	G+ Mini
S1	Multi-Function input 1 (1: Run forward 0: Stop)	120 VAC (Photocoupler 24 VDC, 8A isolation*)	120 VAC (Photocoupler 24 VDC, 8A isolation*)	120 VAC (Photocoupler 24 VDC, 8A isolation*)
X2 (SC*)	Multi-Function input common	0V	0V	0V
RP	Pulse input (frequency reference)	Frequency range: 1.0~32 kHz	Frequency range: 0.5~32 kHz	Frequency range: 0.5~32 kHz

* With 120 VAC interface card removed

Product Transition Guide

G+ Mini Rev:

Control Terminals		Function	Signal Level		
P3 Series 2	G+ Mini		P3 Series 2	G+ Mini	
FS	+V	Analog input power supply	+12 V (max. current 20 mA)	+10.5 V (max. current 20 mA)	
FR	A1	Analog input 1 Voltage or current (not available on G+ Mini - see Note) input (frequency reference)	0~+10 VDC (20 kW), 0 or 4~20 mA (250 kW)	0~+10 VDC (20 kW)	
—	A2	Analog input 2 (frequency reference)	—	DC:0~+10 V (20 kΩ) 0 or 4~20 mA (250 kΩ) (initial setting: 4-20 mA)	
FC	AC	Analog input common	0 V		
—	HC	Hard wire baseblock common	—	+24 V (max. current 10 mA)	
—	H1	Hard wire baseblock input (EN954-1, category 3, Stop category 0)	—	Open: Stop Closed: Operation	
MA		Multi-Function Digital Output (N.O. Contact) (Fault)	Max. AC load: 250 VDC, 1 A max. 30 VDC, 1 A max.	Max. load: AC:250 V, 10 mA~1 A DC:30 V, 10 mA~1 A	
MB		Multi-Function Digital Output (N.O. Contact) (Fault)			
MC		Multi-Function Digital Output (common)			
P1		Open collector output 1 (during run)	Photocoupler +48 VDC, 50 mA or less Output		
P2		Open collector output 2 (speed agree)			
PC		Open collector output common			
—	MP	Pulse output (output frequency)	—	Max. 32 kHz	
AM		Analog output	DC:0~+10 V, 2 mA max. Resolution: 8 bit	DC:0~+10 V, 2 mA max. Resolution: 1/1000	
AC		Analog output GND			

Note: The current input for terminal A1 is not available on the G+ Mini. Use terminal A2 for current input.

Network Communications Terminals

- “—” indicates that an equivalent terminal on the other unit does not exist.

Serial Communication Terminals		Function	Signal Level	
P3 Series 2	G+ Mini		P3 Series 2	G+ Mini
R+	R+	Receive +	RS-485/422 MEMOBUS Protocol Max. 19.2 kbps	RS-485/422 MEMOBUS Protocol Max. 115.2 kbps
R-	R-	Receive -		
S+	S+	Transmit +		
S-	S-	Transmit -		
GND	IG	Shield connection, GND	0V	0V

Product Transition Guide

G+ Mini Rev:

Terminal Size / Electric Wire Differences - 3 Phase 200V Class

Drive Type		Terminal Symbol	P3 Series 2				G+ Mini			
P3S2	G+ Mini		Screw Size	Tightening Torque lb-in (N·m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)	Screw Size	Tightening Torque lb-in (N·m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)
2001 2003 2005	2001 2003 2005	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -, +1, +2, B1, B2,	M3.5	7.1~8.9 (0.8~1.0)	18~14 (0.75~2.0)	14 (2)	M3.5	7.1~8.9 (0.8~1.0)	18~14 (0.75~2)	14 (2)
2008	2008	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -, +1, +2,	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	14 (2)	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	14 (2)
						12 (3.5)			14~10 (2.0~5.5)	12 (3.5)
2011	2001	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -, +1, +2, B1, B2,	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	12 (3.5)	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	12 (3.5)
2017	2017	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -, +1, +2, B1, B2,	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	10 (5.5)	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	10 (5.5)
2025	2025	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -, +1, +2, 	M5	22.2 (2.5)	10~8 (5.5~8.0)	8 (8)	M5	17.7~22.1 (2~2.5)	10~6 (5.5~14)	8 (8)
		B1, B2,					M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	10 (5.5)
2033	2033		M5	22.2 (2.5)	10~8 (5.5~8.0)	8 (8)	M5	17.7~22.1 (2~2.5)	10~6 (5.5~14)	8 (8)
		R/L1,S/L2, T/L3,U/ T1,V/T2,W/ T3,-, +1, +2,							6 (14)	
		B1, B2,					M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	10 (5.5)
	2047						M6	4~6 (35.4~53.1)	14~22 (6~4)	22 (4)
		R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -, +1, +2					M6	4~6 (35.4~53.1)	14~22 (6~4)	22 (4)
		B1, B2					M5	2~2.5 (17.7~22.1)	5.5~8 (10~8)	8 (8)

Product Transition Guide

G+ Mini Rev:

Drive Type		Terminal Symbol	P3 Series 2				G+ Mini			
P3S2	G+ Mini		Screw Size	Tightening Torque lb-in (N·m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)	Screw Size	Tightening Torque lb-in (N·m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)
2060		(⊕)					M6	4~6 (35.4~53.1)	8~22 (8~4)	22 (4)
		R/L1, S/L2, T/L3, U/T1, V/T2, W/T3, -, +1, +2					M8	9~11 (79.7~11.0)	8~38 (8~2)	38 (2)
		B1, B2					M5	2~2.5 (17.7~22.1)	8~14 (8~6)	14 (6)

Product Transition Guide

G+ Mini Rev:

Terminal Size / Electric Wire Differences - 3 Phase 400V Class

Drive Type		Terminal Symbol	P3 Series 2				G+ Mini			
P3S2	G+ Mini		Screw Size	Tightening Torque lb-in (N·m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)	Screw Size	Tightening Torque lb-in (N·m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)
4001 4002 4003 4004	4001 4002 4003 4004	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -,+1,+2,B1, B2 	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	14 (2)	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	14 (2)
4008	4009	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -,+1,+2,B1, B2, 	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	14 (2)	M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	14 (2)
						12 (3.5)				12 (3.5)
4014	4014		M4	12.4 (1.4)	12~10 (3.5~5.5)	10 (5.5)	M5	17.7~22.1 (2.0~2.5)	10~6 (5.5~14)	10 (5.5)
		R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -,+1,+2, B1,B2,					M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	
4018	4018	R/L1,S/L2, T/L3,U/T1, V/T2,W/T3, -,+1,+2	M5	22.2 (2.5)	10~8 (5.5~8)	10 (5.5)	M5	17.7~22.1 (2.0~2.5)	10~6 (5.5~14)	8 (8)
							M4	10.6~13.3 (1.2~1.5)	14~10 (2.0~5.5)	10 (5.5)
		B1, B2								
	4024	R/L1, S/L2, T/L3, U/T1, V/T2, W/T3, -, +1, +2					M5	2~2.5 (17.7~22.1)	5.5~14 (10~6)	8 (8)
							M6	4~6 (35.4~53.1)	5.5~14 (10~6)	8 (8)
		B1, B2					M5	2~2.5 (17.7~22.1)	5.5~8 (10~8)	8 (8)
	4031	R/L1, S/L2, T/L3, U/T1, V/T2, W/T3, -, +1, +2					M5	2~2.5 (17.7~22.1)	5.5~14 (10~6)	14 (6)
							M6	4~6 (35.4~53.1)	5.5~14 (10~6)	8 (8)
		B1, B2					M5	2~2.5 (17.7~22.1)	5.5~8 (10~6)	8 (8)

Product Transition Guide

G+ Mini Rev:

Control Terminal Sizes and Wire Sizes

Terminals (New/Changed in G+ Mini)	P3 Series 2				G+ Mini			
	Screw Size	Tighten. Torque in-lbs (N•m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)	Screw Size	Tighten. Torque in-lbs (N•m)	Applicable Wire Size AWG (mm ²)	Recommended Wire Size AWG (mm ²)
MA, MB, MC	M3	4.4~5.3 (0.5~0.6)	Stranded 20~16 (0.5~1.25) Solid 20~16 (0.5~1.25)	18 (0.75)	M3	4.4~5.3 (0.5~0.6)	Stranded 24~16 (0.25~1.25) Solid 24~16 (0.25~1.25)	18 (0.75)
S1-S7, P1, P2, SC, PC, R+, R-, S+, S-, FS (V+) FR (A1), (A2), FC (AC), AM, AC, RP (MP), (HC), (H1)	M2	1.9~2.2 (0.22~0.25)	Stranded 20~18 (0.5~0.75) Solid 20~16 (0.5~1.25)	18 (0.75)	M2	1.9~2.2 (0.22~0.25)	Stranded 24~18 (0.25~0.75) Solid 24~16 (0.25~1.25)	18 (0.75)

Terminal Comparisons

Note: Refer to G+ Mini Basic Instruction Manual (P/N 144-25084) for warnings, cautions and additional notes.

Product Transition Guide

G+ Mini Rev:

1.5 Dimensions, Installation Space and Substitution Material

IMPULSE® P3 Series 2 Dimensions & Drive Ratings

Voltage Class	Model	Max Full Load	Rated Hp. (Approx)	W (in)	H (in)	D (in)	W1 (in)	H1 (in)	d	Wt. LB.	Total Heat Loss
3 Phase 200 V	2001-P3S2	1.6	0.25	2.68	5.04	2.99	2.20	4.65	M4	1.55	18.0
	2003-P3S2	3.0	.5	2.68	5.04	4.25	2.20	4.65	M4	2.20	28.1
	2005-P3S2	5.0	1.0	2.68	5.04	5.04	2.20	4.65	M4	2.65	45.1
	2008-P3S2	8.0	2.0	4.25	5.04	5.16	3.78	4.65	M4	3.53	72.8
	2011-P3S2	11.0	3.0	4.25	5.04	5.51	3.78	4.65	M4	3.53	94.8
	2017-P3S2	17.5	5.0	5.51	5.04	5.63	5.04	4.65	M4	5.30	149.1
	2025-P3S2	25.0	7.5	7.09	10.24	6.70	6.46	9.61	M5	10.14	256.5
	2033-P3S2	33.0	10.0	7.09	10.24	6.70	6.46	9.61	M5	10.58	308.9
3 Phase 400 V	4001-P3S2	1.2	0.5	4.25	5.04	3.62	3.78	4.65	M4	2.65	23.1
	4002-P3S2	1.8	0.75	4.28	5.04	4.33	3.78	4.65	M4	2.65	30.1
	4003-P3S2	3.4	1.0/2.0	4.25	5.04	5.51	3.78	4.65	M4	3.75	54.9
	4004-P3S2	4.8	3.0	4.25	5.04	6.14	3.78	4.65	M4	3.75	75.7
	4008-P3S2	8.6	5.0	5.51	5.04	5.63	5.04	4.65	M4	5.30	117.9
	4014-P3S2	14.8	7.5	7.09	10.54	6.70	6.46	9.61	M5	10.14	256.5
	4018-P3S2	18.8	10.0	7.09	10.24	6.70	6.46	9.61	M5	10.58	308.9

Product Transition Guide

G+ Mini Rev:


IMPULSE® G+ Mini Dimensions & Drive Ratings

Voltage Class	Model	Max Full Load	Rated Hp (Approx)	W (in)	H (in)	D (in)	W1 (in)	H1 (in)	d	Wt. LB.	Total Heat Loss*
3 Phase 200V	2001-G+M	1.6	.25	2.68	5.04	2.99	2.20	4.65	M4	1.3	14.7
	2003-G+M	3.0	.5	2.68	5.04	4.25	2.20	4.65	M4	2.0	24.0
	2005-G+M	5.0	1	2.68	5.04	5.04	2.20	4.65	M4	2.4	36.7
	2008-G+M	8.0	2	4.25	5.04	5.08	3.78	4.65	M4	3.7	61.9
	2011-G+M	11	3	4.25	5.04	5.41	3.78	4.65	M4	3.7	81.3
	2017-G+M	17.5	5	5.51	5.04	5.63	5.04	4.65	M4	5.3	122.7
	2025-G+M	25.0	7.5	5.51	10.00	5.51	4.80	9.76	M5	8.4	248.5
	2033-G+M	33.0	10	5.51	10.00	5.51	4.80	9.76	M5	8.4	282.6
	2047-G+M	47.0	15	7.09	11.42	6.42	6.30	11.18	M5	12.1	389.7
	2060-G+M	60.0	20	8.66	13.78	7.36	7.56	13.23	M5	20.3	536.8
3 Phase 400V	4001-G+M	1.2	.5	4.25	5.04	3.19	3.78	4.65	M4	2.2	19.1
	4002-G+M	1.8	.75	4.25	5.04	3.90	3.78	4.65	M4	2.6	27.1
	4003-G+M	3.4	2	4.25	5.04	5.41	3.78	4.65	M4	3.7	38.3
	4004-G+M	4.8	3	4.25	5.04	6.06	3.78	4.65	M4	3.7	57.4
	4009-G+M	9.2	5	5.51	5.04	5.63	5.04	4.65	M4	5.3	97.1
	4014-G+M	14.8	7.5	5.51	10.00	5.51	4.80	9.76	M5	8.4	173.4
	4018-G+M	18.0	10	5.51	10.00	5.51	4.80	9.76	M5	8.4	219.4
	4024-G+M	24.0	15	7.09	11.42	5.63	6.30	11.18	M5	11.5	283.8
	4031-G+M	31.0	20	7.09	11.42	6.42	6.30	11.18	M5	12.1	344.3

*Heat loss for carrier frequency of 2.0 KHz (Heavy Duty)

Product Transition Guide G+ Mini Rev:


IMPULSE® P3 Series 2 Wiring Diagram

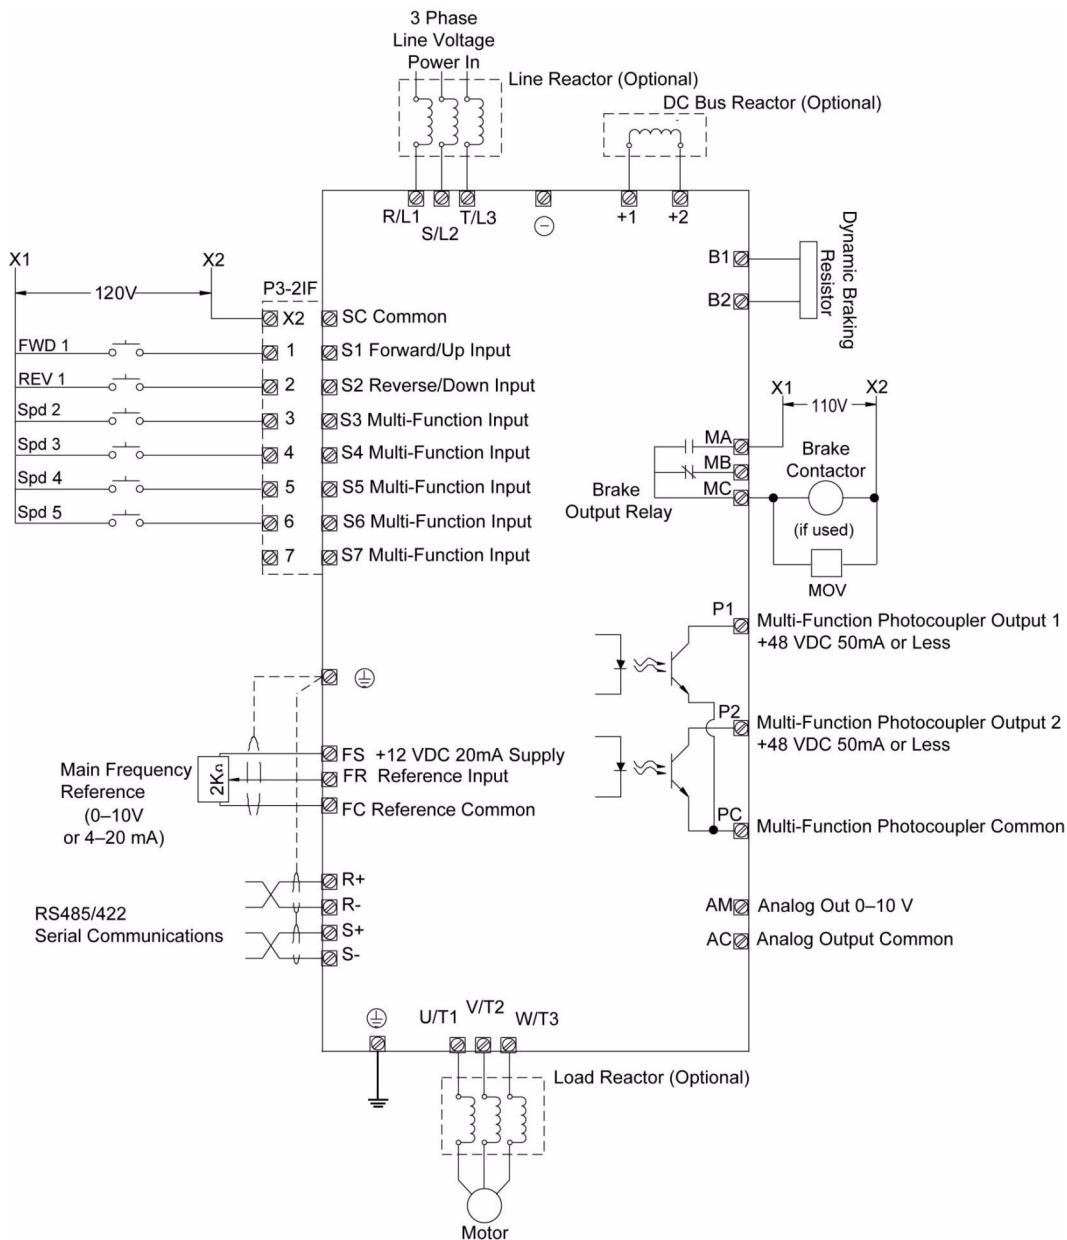

Product Transition Guide

G+ Mini Rev:

IMPULSE® G+ Mini Wiring Diagram

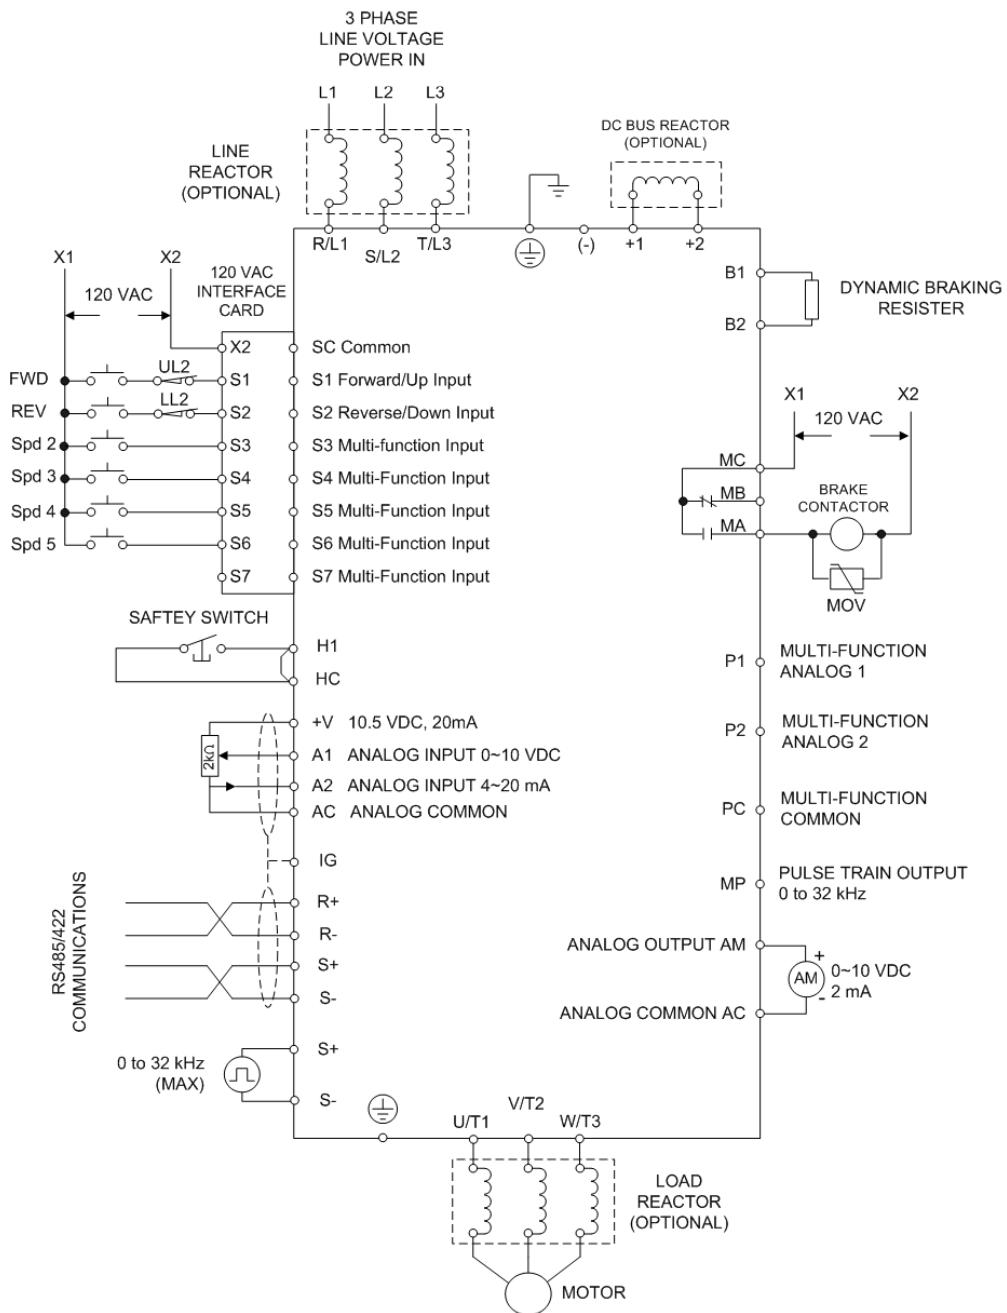

1.6 Parameter Correspondence Table

P3 Series 2 and G+ Mini Differences in Parameter Settings

The list in Section 1.6 shows the parameter relations between the P3 Series 2 and the G+ Mini. It lists the parameters and setting values necessary for P3 Series 2 replacement by a G+ Mini, but does not show the complete G+ Mini parameters and extended parameter setting ranges. For details about new functions, parameters and parameter settings refer to the instruction manual.

P3 Series 2→G+ Mini Parameter Correspondence for Drive Replacement

Parameter Function	Drive	P3 Series 2			G+ Mini			Note	
		Param. No.	Initial Value	Set Value	Param. No.	Initial Value	Set Value		
Motion Selection	n000	6			A01.03	1		P3 Series 2	G+ Mini
						n000→0~4		A01.03→0	
						n000→5~9		A01.03→1	
Speed Reference Selection	n000	6		A01.04	1			n000→0~4	A01.04→0~4
								n000→5	A01.04→0
								n000→6	A01.04→1
				A01.05	0			n000→7	A01.04→2
Initialize								n000→8	A01.04→3
								n000→9	A01.04→4
Motor Rated Current	n001	1 ^A		E02.01	1 ^A				
Access Level	n002	0		A01.01	1			P3 Series 2	G+ Mini
								n002→0~1	A01.01→0
								n002→2	A01.01→1
								n002→9,A	A01.01→3
Frequency Reference 1	n003	6.00 ^B		B01.01	6.00 ^B				
Frequency Reference 2	n004	30.00 ^B		B01.02	30.00 ^B				
Frequency Reference 3	n005	60.00 ^B		B01.03	60.00 ^B				
Frequency Reference 4	n006	0.00 ^B		B01.04	45.00 ^B				
Frequency Reference 5	n007	60.00 ^B		B01.05	60.00 ^B				
Acceleration Time 1	n008	5.0 ^B		B05.01	5.0 ^B				
Deceleration Time 1	n009	3.0 ^B		B05.02	3.0 ^B				
Special Functions	n010	0000	C01.01	0 ^B				P3 Series 2	G+ Mini
								n010→xxx0	C01.01→0
								n010→xxx1	C01.01→1
			C01.03	0				n010→xx0x	C01.03→0
								n010→xx1x	C01.03→1
			C06.01	0				n010→x0xx	C06.01→0
								n010→x1xx	C06.01→1
Acceleration Time 2	n011	2.5		B05.03	2.0				
Deceleration Time 2	n012	1.5		B05.04	2.0				

^A - Initial value depends on the drive model number.

^B - Value changes by X - press programming (A01.03)

Product Transition Guide

G+ Mini Rev:

Parameter Function	Drive	P3 Series 2			G+ Mini			Note
		Param. No.	Initial Value	Set Value	Param. No.	Initial Value	Set Value	
Run Signal Selection 1	n013	0101		B03.01	1			P3 Series 2 G+ Mini
				n013→xxx0				B03.01→0
				n013→xxx1				B03.01→1
Electronic Thermal Motor Protection	n014	0100		B03.02	1			P3 Series 2 G+ Mini
				n013→xx0x				B03.02→0
				n013→xx1x				B03.02→1
Number of Fault Retries	n015	3		B03.03	1 ^B			P3 Series 2 G+ Mini
				n013→x0xx				B03.03→0
				n013→x1xx				B03.03→1
Selection of Other Functions	n016	0101		L01.01	1			P3 Series 2 G+ Mini
				n014→x000				L01.01→3
				n014→x010				
Over torque Detection Selection	n017	0000		L09.01	1			P3 Series 2 G+ Mini
				n014→x100				L01.01→1
				n014→x110				L01.01→2
Over torque Detection Level	n018	100		L09.05	E000			P3 Series 2 G+ Mini
				n014→x001				L01.01→0
				n014→x011				
Over torque Detection Delay Time	n019	0.2		D09.01	0.50 ^B			P3 Series 2 G+ Mini
				D09.02	0.50 ^B			H04.01→102
				D09.03	0.50 ^B			H04.01→103
Swift Lift Frequency	n020	60		D09.04	0.20			D09.01~4→0.00
				n016→00xx				D09.01~4→0.20
				n016→10xx				D09.01~4→0.50
Swift Lift Enabling Current at Forward	n021	50		C06.02	60.0			D09.01~4→1.00
				C06.03	60.0			
				C06.04	50			
Swift Lift Enabling Current at Reverse	n022	0		C06.05	30			

^B - Initial value changes based on X-Press programming (A01.03)

^C - This parameter is only accessible in Advanced mode.

Product Transition Guide

G+ Mini Rev:

Parameter Function	Drive	P3 Series 2			G+ Mini			Note
		Param. No.	Initial Value	Set Value	Param. No.	Initial Value	Set Value	
Swift Lift Delay Time at Threshold Speed	n023	0.2		C06.07	2.0			
Analog Frequency Reference Gain	n024	1.00		H03.03	100.0			
Analog Frequency Reference Bias	n025	0.00		H03.04	0.0			
DC Injection Braking Current	n026	50		D01.02	50			
DC Injection Time at Stop	n027	0.5		D01.04	0.05			
Torque Compensation Gain	n029	1.0		D03.01	1.00			
Stall Prevention at Accel	n030	170		L03.01	1		P3 Series 2	G+ Mini
							n030→30%~199%	L03.01→1 L03.02→n030
Stall Prevention During Run	n031	160		L03.05	1		P3 Series 2	G+ Mini
							n031→30%~199%	L03.05→1 L03.06→n031
Terminal S3 function selection	n032	0		H01.03 ^B	0		P3 Series 2	G+ Mini
							n032~34→0	H01.03~H01.05→0
Terminal S4 function selection	n033	1		H01.04 ^B	1		P3 Series 2	G+ Mini
							n032~34→1	H01.03~H01.05→1
Terminal S5 function selection	n034	5		H01.05 ^B	0F		P3 Series 2	G+ Mini
							n032~34→2	H01.03~H01.05→2
Terminal MA, MB, MC function selection	n035	0		H02.01 ^B	0		P3 Series 2	G+ Mini
							n035~37→0	H02.01~03→0
Terminal P1 function selection (Open collector)	n036	4		H02.02 ^B	F		P3 Series 2	G+ Mini
							n035~37→1	H02.01~03→1
Terminal P2 function selection (Open collector)	n037	5		H02.03 ^B	F		P3 Series 2	G+ Mini
							n035~37→2	H02.01~03→4
Fault History	n041	-	-	U02.02	-	-	In the G+ Mini the last fault can be traced in the U02.xx monitors.	
Software Number	n042	-	-	U01.14	-	-		

^B - Initial value changes based on X-Press programming (A01.03)

Product Transition Guide

G+ Mini Rev:

Parameter Function	Drive	P3 Series 2			G+ Mini			Note																
		Param. No.	Initial Value	Set Value	Param. No.	Initial Value	Set Value																	
Max. Output Frequency	n043	60.0			E01.04	60.0																		
Max. Output Voltage	n044	230.0			E01.05	230.0 ^D																		
Max. Voltage Frequency	n045	60.0			E01.06	60.0																		
Mid. Output Frequency	n046	3.0			E01.07	3.0 ^E																		
Mid. Output Frequency Voltage	n047	19.5			E01.08	19.5 ^{D E}																		
Min. Output Frequency	n048	1.5			E01.09	1.5 ^E																		
Min. Output Frequency Voltage	n049	12.6			E01.10	12.6 ^{D E}																		
Analog Frequency Reference Signal Selection	n050	0000		H03.09	2		<table border="1"> <thead> <tr> <th>P3 Series 2</th> <th>G+ Mini</th> </tr> </thead> <tbody> <tr> <td>n050→xxx0 n050→xx11</td> <td>H03.09→0 (switch S1-2 must be in the OFF position) H03.09→2 (switch S1-2 must be in the ON position)</td> </tr> <tr> <td>n050→xx0x n050→xx1x</td> <td>No Function</td> </tr> <tr> <td>n050→x0xx n050→x1xx</td> <td>No Function</td> </tr> <tr> <td>n050→0xxx n050→1xxx</td> <td>No Function</td> </tr> </tbody> </table>		P3 Series 2	G+ Mini	n050→xxx0 n050→xx11	H03.09→0 (switch S1-2 must be in the OFF position) H03.09→2 (switch S1-2 must be in the ON position)	n050→xx0x n050→xx1x	No Function	n050→x0xx n050→x1xx	No Function	n050→0xxx n050→1xxx	No Function						
P3 Series 2	G+ Mini																							
n050→xxx0 n050→xx11	H03.09→0 (switch S1-2 must be in the OFF position) H03.09→2 (switch S1-2 must be in the ON position)																							
n050→xx0x n050→xx1x	No Function																							
n050→x0xx n050→x1xx	No Function																							
n050→0xxx n050→1xxx	No Function																							
Analog Input Filter Time Constant	n051	0.10		H03.13	0.03																			
Terminal S6 function selection	n052	0F		H01.06	0F		<table border="1"> <thead> <tr> <th>P3 Series 2</th> <th>G+ Mini</th> </tr> </thead> <tbody> <tr> <td>n032~34→0</td> <td>H01.03~H01.05→0</td> </tr> <tr> <td>n032~34→1</td> <td>H01.03~H01.05→1</td> </tr> <tr> <td>n032~34→2</td> <td>H01.03~H01.05→2</td> </tr> <tr> <td>n032~34→3</td> <td>H01.03~H01.05→4</td> </tr> <tr> <td>n032~34→4</td> <td>H01.03~H01.05→5</td> </tr> <tr> <td>n032~34→5</td> <td>H01.03~H01.05→13</td> </tr> </tbody> </table>		P3 Series 2	G+ Mini	n032~34→0	H01.03~H01.05→0	n032~34→1	H01.03~H01.05→1	n032~34→2	H01.03~H01.05→2	n032~34→3	H01.03~H01.05→4	n032~34→4	H01.03~H01.05→5	n032~34→5	H01.03~H01.05→13		
P3 Series 2	G+ Mini																							
n032~34→0	H01.03~H01.05→0																							
n032~34→1	H01.03~H01.05→1																							
n032~34→2	H01.03~H01.05→2																							
n032~34→3	H01.03~H01.05→4																							
n032~34→4	H01.03~H01.05→5																							
n032~34→5	H01.03~H01.05→13																							
Terminal S7 function selection	n053	0F		H01.07	0F		<table border="1"> <tbody> <tr> <td>n032~34→6</td> <td>H01.03~H01.05→3F</td> </tr> <tr> <td>n032~34→7</td> <td>H01.03~H01.05→1A</td> </tr> <tr> <td>n032~34→8</td> <td>H01.03~H01.05→32</td> </tr> <tr> <td>n032~34→9</td> <td>H01.03~H01.05→33</td> </tr> <tr> <td>n032~34→A</td> <td>H01.03~H01.05→4C</td> </tr> <tr> <td>n032~34→B~F</td> <td>H01.03~H01.05→F</td> </tr> <tr> <td>n032~34→10~1F</td> <td>H01.03~H01.05→20</td> </tr> <tr> <td>n032~34→20</td> <td>H01.03~H01.05→3</td> </tr> </tbody> </table>		n032~34→6	H01.03~H01.05→3F	n032~34→7	H01.03~H01.05→1A	n032~34→8	H01.03~H01.05→32	n032~34→9	H01.03~H01.05→33	n032~34→A	H01.03~H01.05→4C	n032~34→B~F	H01.03~H01.05→F	n032~34→10~1F	H01.03~H01.05→20	n032~34→20	H01.03~H01.05→3
n032~34→6	H01.03~H01.05→3F																							
n032~34→7	H01.03~H01.05→1A																							
n032~34→8	H01.03~H01.05→32																							
n032~34→9	H01.03~H01.05→33																							
n032~34→A	H01.03~H01.05→4C																							
n032~34→B~F	H01.03~H01.05→F																							
n032~34→10~1F	H01.03~H01.05→20																							
n032~34→20	H01.03~H01.05→3																							
Basic/Advanced Parameter Switchover	n060	0		A01.01	1		<table border="1"> <thead> <tr> <th>P3 Series 2</th> <th>G+ Mini</th> </tr> </thead> <tbody> <tr> <td>n060→1</td> <td>A01.01→2</td> </tr> <tr> <td colspan="2">(See Advanced Manual if P3S2 was used in the advanced mode)</td></tr> </tbody> </table>		P3 Series 2	G+ Mini	n060→1	A01.01→2	(See Advanced Manual if P3S2 was used in the advanced mode)											
P3 Series 2	G+ Mini																							
n060→1	A01.01→2																							
(See Advanced Manual if P3S2 was used in the advanced mode)																								

^D - The value is for the 230 V class inverter value. For 460V class, the value is twice that of the 230V class.

^E - Changing control mode changes factory setting. (V/f control is shown)

1.7 Appendix

P3 Series 2 and G+ Mini Differences in Watts Loss - Class D Operation

Voltage Class	Maximum Motor Power kW	P3 Series 2 Type	G+ Mini Type	P3 Series 2 @ 2.5 KHz			G+ Mini @ 2.0 KHz		
				Heatsink Loss (W)	Interior Unit Loss (W)	Total Loss (W)	Heatsink Loss (W)	Interior Unit Loss (W)	Total Loss (W)
3 Phase 200V	0.2	2001	2001	7.7	10.3	18.0	6.3	8.4	14.7
	0.4	2003	2003	15.8	12.3	28.1	13.2	10.8	24.0
	0.75	2005	2005	28.4	16.7	45.1	22.2	14.5	36.7
	1.5	2008	2008	53.7	19.1	72.8	41.5	20.4	61.9
	2.2	2011	2011	60.4	34.4	94.8	55.2	26.1	81.3
	3.7	2017	2017	96.7	52.4	149.1	85.6	37.1	122.7
	5.5	2025	2025	170.4	79.4	249.8	184.5	64.0	248.5
	7.5	2033	2033	219.2	98.9	318.1	206.6	76.0	282.6
	-	-	2047	-	-	-	283.4	106.3	389.7
	-	-	2060	-	-	-	393.2	143.6	536.8
3 Phase 400V	0.2	4001	4001	9.4	13.7	23.1	10.0	9.1	19.1
	0.4	4002	4002	15.1	15.0	30.1	15.6	11.5	27.1
	0.75	4003	4003	30.3	24.6	54.9	24.8	13.5	38.3
	1.5	4004	4004	45.8	29.9	75.7	39.1	18.3	57.4
	3.7	4008	4009	73.4	44.5	117.9	65.9	31.2	97.1
	5.5	4014	4014	168.8	87.7	256.5	119.0	54.4	173.4
	7.5	4018	4018	209.6	99.3	308.9	151.2	68.2	219.4
	-	-	4024	-	-	-	191.3	92.5	283.8
	-	-	4031	-	-	-	232.9	111.4	344.3

Product Transition Guide

G+ Mini Rev:

P3 Series 2 and G+ Mini Specification Differences

Category	Feature	Item	P3 Series 2	G+ Mini
Power Section	Control Method	–	Sinewave PWM: V/F & OLV	Sinewave PWM: V/F & OLV
	Ratings	230v, 3ph.	0.125 to 10 HP	0.125 to 20 HP
	Ratings	460v, 3ph.	0.5 to 10 HP	0.5 to 20 HP
	Maximum Output Frequency	–	400 Hz	400 Hz
	Carrier Frequency	–	10 kHz (model dependent)	HD: 2 kHz
	F _c Default (derate)	–	Constant	Swing PWM
	Braking Transistor Circuit	–	Built-in to 10 HP	Built-in to 25 HP
	Short Circuit Withstand Rating	–	18,000 A RMS Symmetrical	30,000 A RMS Symmetrical
Control Section	Digital Operator	Display	LED 4x 7 seg. (LCD option)	LED 5x 7 seg.
	Digital Operator	Number of Keys	6	8
	Copy Function	–	Built-in	Built-in USB copy unit option
	Microprocessor	–	Single	Dual
	Control Method	Pseudo-Closed Loop	No	Yes, w/ RP input
	Digital Input	Scan Rate	8 msec.	4 msec.
	Analog Input	Qty.	1 (Programmable)	2 (Programmable)
	Analog Input	Scan Rate	8 msec.	2 msec.
	Analog Input	Freq. Ref Voltage	15 Vdc	10.5 Vdc
	Analog Output	Scan Rate	8 msec.	2 msec.
	Pulse Input	Qty.	1 (Programmable)	1 (Programmable)
	Pulse Input	Input Frequency	33 kHz	32 kHz
	Pulse output	Qty.	1 (Programmable)	1 (Programmable)
	Pulse output	Output Frequency	1.44 kHz	32 kHz
	Digital Operator	Display	8 LED Indicators	6 LED Indicators
	Removable Terminal Block	–	No	Yes (w / memory)
	Thermistor Input PTC	–	No	Yes

Product Transition Guide

G+ Mini Rev:

Category	Feature	Item	P3 Series 2	G+ Mini
Control Characteristics	Overload Capacity	–	150% for 1 min.	HD: 150% for 1 min.
	Starting Torque	–	150% @ 3 Hz (V/f)	150% @ 3 Hz (V/f), 200% @ 0.5 Hz (OLV)
	Output Frequency Resolution	–	0.01 Hz	0.01 Hz
	Auto-Tuning	Automatic/OnLine	No	Yes, R1 and Rotational
	Elapse Time	–	No	Yes (Power up or Run)
	Fault Storage	–	Last 4	Last 10 w / Elapsed Time Meter
	Fault Record	–	No Trace Data Points	15 Trace Data Points
	High Current Alarm	HCA	No	Yes, 150%
	OV Suppression	–	Option- CASE	Standard
	Torque Detection	–	Over-Torque	Over and Under-Torque
	Overtemperature	Memory Retention	No	Yes
	Overtemperature	–	OH	Auto-Speed Reduction on OH
	Cooling Fan	–	Bottom-mount	Top-mount
	Drive Enable Run Permissive	–	None	Meets EN954-1, Cat. 3
Key Features	RS485 Comms	Comm. Speed	19.2kbps	115.2kbps
	Parameter Upload/ Download	–	IMPULSE Link 4.1 Basic	IMPULSE Link 4.1 Basic IMPULSE Link 4.1 WDS
	Maintenance Monitors	–	None	Capacitors, Fans, IGBTs
Enclosures	Hybrid Heatsink	–	No	Yes
	Types	Open Chassis - IP20	230 V and 460 V to 10 Hp	230 V and 460 V to 25 Hp
	Types	NEMA 1 - IP20	230 V and 460 V to 10 Hp	230 V and 460 V to 25 Hp
Harmonics	Side-by-Side Mounting	–	No	Yes
	Harmonic Filters	–	C1 as Option	C1, C2, C3 as Options
EMC	Internal RFI/EMC Filter	–	C1 as Option	C1, C2, C3 as Options
Standards	Third Party Certifications	–	UL / cUL / CE	UL / cUL / CE, RoHS, TÜV
Environment	Ambient Temperature	–	-10 to 40° C	-10 to +50° C (IP20)

P3 Series 2 to G+ Mini Product Transition Guide

Data Subject to change without notice.



Magnetek, Inc.
N49 W13650 Campbell Drive
Menomonee Falls, WI 53051
(800) 288-8178 Fax (262) 783-3510
www.magnetekmh.com